

WPL86LED

86 Watt LED Wall Pak Pro

REPLACES UP TO 400W MH



- 10,730 **LUMENS**
- 86 **WATTS**
- 121 **LPW**
- 80 **CRI**
- 4500K **CCT**
- 0-10V **DIMMING**
- REC MNT HT**
18 FT to 20 FT



- Eliminates Glare & Offensive Light
- Less Wasted Light
- More Footcandles on the Ground
- Labor Saving: Quick and Secure Mounting

12"Wx8.79"Hx12.5"D
21.5 LBS


Design is Protected
by U.S. Patent No.
D740,997 and D752,274

ORDERING INFORMATION

CATALOG #	DESCRIPTION	CCT	REPLACES UP TO	VOLTS
WPL86LED	86W LED Wall Pak Pro	4500K	400W MH	120-277

Specs shown are for 4500K CCT. Also available in 3000K, 4000K and 5000K. See Cut Sheet for more information.

FOOTCANDLES ON THE GROUND

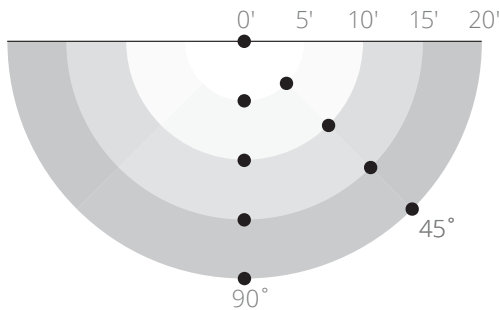

	18' Mtg Height		20' Mtg Height	
	90°	45°	90°	45°
0'	14.8	14.8	12.1	12.1
5'	14.3	13.6	11.8	11.3
10'	10.5	9.9	9.2	8.7
15'	6.9	6.4	6.4	6.1
20'	4.4	4.1	4.4	4.1
Average		9.1	Average	
			8.0	

OPTIONS

ADD SUFFIX #	DESCRIPTION	ADD SUFFIX #	DESCRIPTION
PC	120V Photocontrol	EB	Emergency Back-Up
PM	208-277V Photocontrol	4	480V Driver

ENERGY SAVINGS

LED		HID			
WATTAGE	ANNUAL COST	SOURCE WATTAGE	TOTAL WATTAGE USED	ANNUAL COST	ANNUAL SAVINGS
86	\$38	200	232	\$128	\$90
86	\$38	250	285	\$150	\$112
86	\$38	400	458	\$226	\$188

QUICK & EASY INSTALLATION



1 Secure Mounting Plate with back box to wall

2 Slide fixture housing onto mounting box

3 Connect wires & return them to mounting box

4 Replace bottom plate on quick mount box



*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components

