

Atlas Wall Pak Pro

American Lighting

WPL86LED 86 Watt LED Wall Pak



3000K or warmer CCTs only

SPECIFICATIONS:

	WPL86LED3K	WPL86LED4K	WPL86LED	WPL86LED5K
Lumens:	10730	10730	10730	11140
Watts:	88.93	88.93	88.93	88.64
Lumens/Watt:	120.66	120.66	120.66	125.68
CRI:	80	80	80	80
CCT:	3000	4000	4500	5000
DLC Prod. ID:	PBEKYZ6V	P2OB53MI	PA05SWW8	P1DINRSB

Construction:

Designed for commercial and industrial applications, providing cooler operating temperatures, brighter light and longer LED life. Manufactured w/ 100% pure aluminum & 0% remelt. Apertures for field or factory installed photocontrol.

Installation:

Labor saving quick mount box with apertures for continuous wiring.

Zero Glare:

Using the latest high brightness, high LED count technology, more usable light output is produced while eliminating glare. The fixture design directs more light down and forward without wasting lumens and offensive light.

Thermal Management:

Atlas Wall Pak Pro fixtures are designed as a complete system to optimize LED life and light output. The Patent Pending thermal stacking heat removal technology extracts heat from within the housing moving it away from LEDs and components. The lower temperatures result in long LED life (200,000+ hrs) and component life and also allows for higher light output.

Listings:

Luminaire is certified to UL/cUL Standards for Wet Locations DesignLights Consortium Premium qualified luminaire, eligible for rebates from DLC member utilities.

AC Input:

120/208/240/277 V

Driver:

Constant current, Class 2, 120-277 VAC, 50-60 Hz
High Efficiency – min. 84%
Off-State Power: 0 Watts
0-10 V Dimming

LEDs:

3000K, 4000K, 4500K, 5000K CCT
Epoxy Guard™ protective conformal coated boards

Warranty: Five-year limited warranty

Testing:

Atlas LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 & LM-80.

Options:

Photo Control - For factory installed 120V button photo control add suffix PC to part number.
480 Volt - For 480V add suffix 4 to part number.
Emergency Battery Back Up - Add suffix EB for Emergency Battery Back Up. Provides emergency illumination (1,580 lumens) for a minimum of 90 minutes.

Project Information

Job Name

Fixture Type 86 Watt LED Die Cast Wall Pak

Catalog Number WPL86LED


Approved by



WPL86LED Design is Protected by US Patent D772,474 and D752,274



DIMENSIONS:

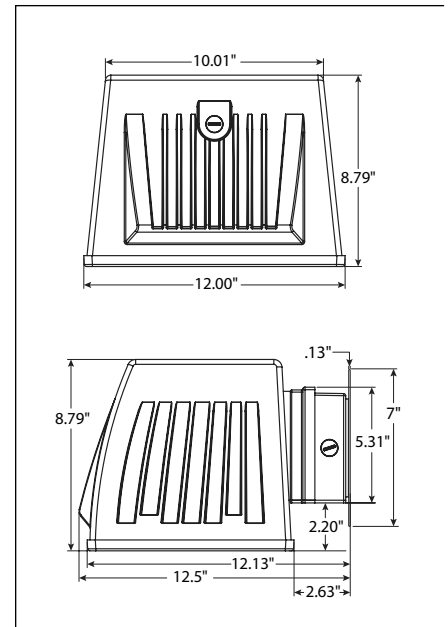

¹LED Life Span Based Upon LM-80 Test Results


ATLAS LIGHTING PRODUCTS, INC.

PO BOX 2348 | BURLINGTON, NC 27216
800-849-8485 | FAX: 1-855-847-2794 | www.atlasled.com

Rebates and Incentives are available in many areas. Contact an Atlas Representative for more information.


*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. Meets Buy American requirements within the ARRA.

ORDERING FORMAT

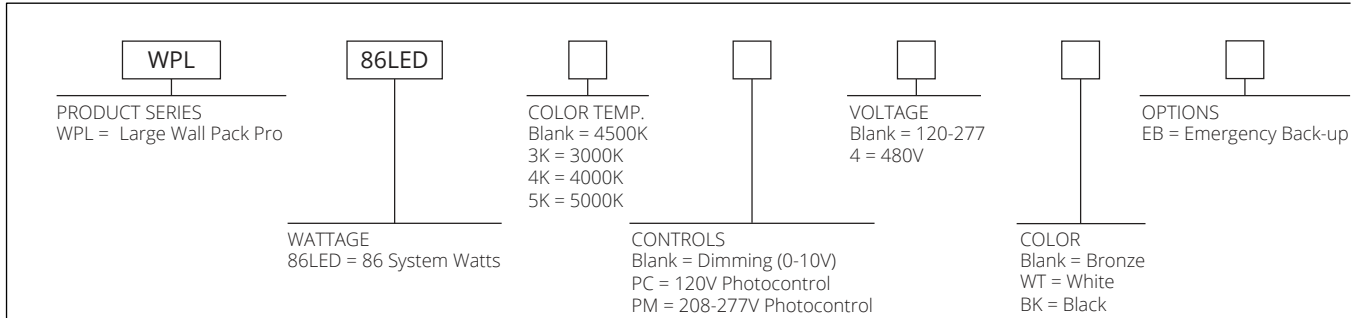


LABOR SAVING: QUICK & SECURE MOUNTING


Protected by US Patent D752,274

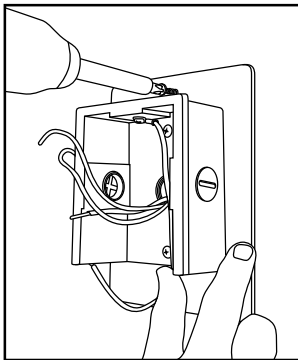


Secure Mounting Plate with back box to wall

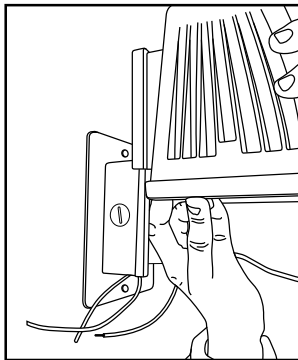

Slide fixture housing onto mounting box

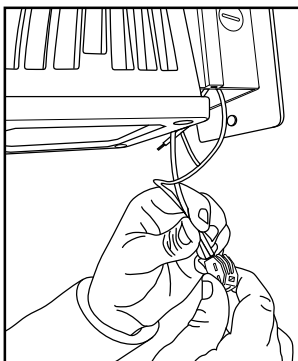


Connect wires & return them to mounting box

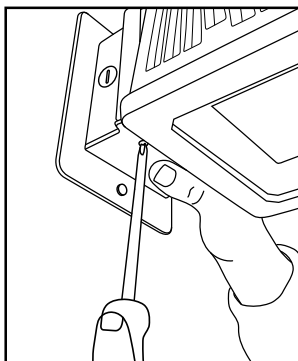

Replace bottom plate on quick mount box

PHOTOMETRIC

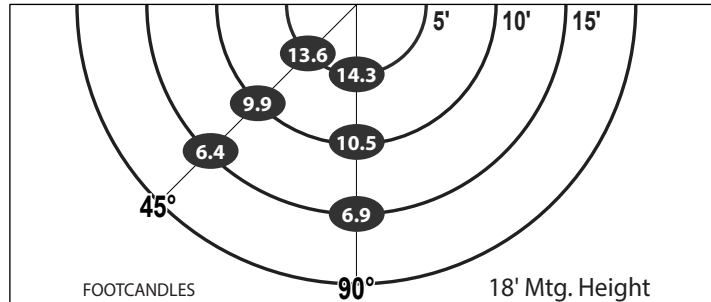

ENERGY SAVINGS

LED		HID			ANNUAL SAVINGS
WATTAGE	ANNUAL COST	SOURCE WATTAGE	TOTAL WATTAGE USED	ANNUAL COST	
86	\$38	200	232	\$128	\$90
86	\$38	250	285	\$150	\$112
86	\$38	400	458	\$226	\$188