

WSPLD60LEDEB



60 Watt LED SlimPak Pro w/ Emergency Back-Up

REPLACES UP TO 250W MH

- Slim Low Profile Design
- Attractive Architectural Styling
- Quick and Easy Mounting
- Bottom Hinged to Prevent Leakage
- Emergency Battery Back Up



Patent Pending

8.88"Wx9.4"Hx5.25"D
7.9 LBS


- 6,412 **LUMENS**
- 60 **WATTS**
- 100 **LPW**
- 73 **CRI**
- 4500K **CCT**
- 0-10V **DIMMING**
- REC MNT HT**
14 FT to 16 FT

ORDERING INFORMATION

CATALOG #	DESCRIPTION	CCT	REPLACES UP TO	VOLTS
WSPLD60LEDEB	60W LED SlimPak Pro w/ Emergency Back-Up	4500K	250W MH	120-277

Specs shown are for 4500K CCT. Also available in 3000K, 4000K and 5000K. See Cut Sheet for more information.

FOOTCANDLES ON THE GROUND

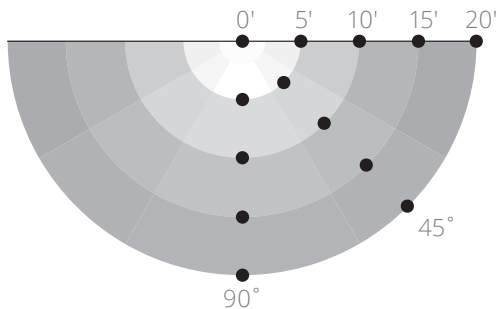

14' Mtg Height

16' Mtg Height

	90°	45°		90°	45°
0'	18.4	18.4	0'	14.0	14.0
5'	19.0	17.0	5'	14.8	13.5
10'	11.5	10.7	10'	10.3	9.5
15'	6.4	5.6	15'	6.2	5.6
20'	3.7	3.1	20'	3.8	3.2

Average **10.1** Average **8.7**

OPTIONS

ADD SUFFIX #	DESCRIPTION	ADD SUFFIX #	DESCRIPTION
PC	120V Photocontrol	PM	208-277V Photocontrol

ENERGY SAVINGS

LED		HID			
WATTAGE	ANNUAL COST	SOURCE WATTAGE	TOTAL WATTAGE USED	ANNUAL COST	ANNUAL SAVINGS
60	\$26	250	285	\$150	\$124
60	\$26	400	458	\$226	\$200

QUICK & EASY INSTALLATION



Unscrew door with Phillips screw driver.



Using the leveling bubble in the wall mounting box, level the fixture & attach to wall.



Secure door to back box with hinge. Complete wiring. Tighten door with screws.



*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components

